



COMPONENT SPECIFICATION SHEET

Locknetics GF3000 Shear Lock



GF3000
(Standard Model)

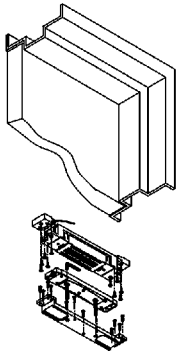

GF3000TRD

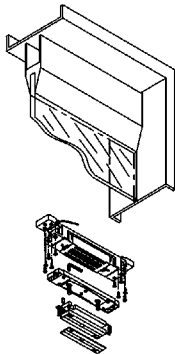

GF3000BRD

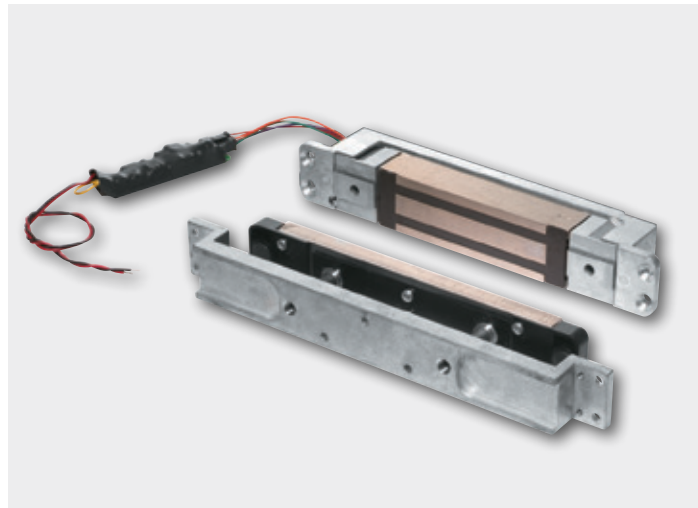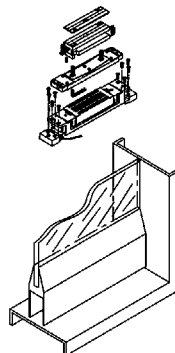

FEATURES & BENEFITS

- Automatic voltage selection 12/24 VDC (filtered)
- 3000 lbs of holding force
- Requires filtered, regulated power supply
- Built-in automatic relock switch
- Adjustable time delay on relock, 0-30 seconds
- Low temperature operation
- Microprocessor controlled
- Optional Magnetic Bond Sensor (MBS) to monitor the secure/not secure condition of the lock
- Optional Door Status Monitor (DSM) to sense the open/closed position of the door
- UL 10C Positive Pressure Fire Tests of Door Assemblies, cUL, CSFM and MEA listed to use on fire labeled openings
- Meets ANSI/BHMA A 156.23 standards

